Fire Hydrant Stortz Fittings
ANY EXISTING HYDRANTS WHICH ARE INCLUDED IN EXHIBIT A HYDRANT LOCATIONS & PULL HOSE DIAGRAM (HYDRANT ON SW CORRNER OF SE 27TH ST AND 76TH AVE SE) MUST BE UPGRADED WITH STORTZ FITTING IF NOT CURRENTLY IN PLACE.

Stormwater Flow Control
THE PROJECT IS PROPOSING TO PROVIDE A FEE IN LIEU OF FLOW CONTROL IN ACCORDANCE WITH CITY OF MERCER ISLAND REQUIREMENTS. THE DETENTION VOLUME WHICH WILL BE USED TO CALCULATE THE FEE ESTIMATE WILL BE 37,000 CU-FT.

Utility Service Sizes/Locations
ALL UTILITY SERVICE SIZES AND HORIZONTAL/VERTICAL LOCATIONS ARE CONTINGENT UPON CONFIRMATION BY THE DESIGN/BUILD PLUMBING CONTRACTOR. DESIGN TO BE CONFIRMED PRIOR TO ISSUANCE OF FINAL CONSTRUCTION DOCUMENTS

Curb Grading In Row
CONTRACTOR SHALL REMOVE EXISTING CURB DAMAGED DURING CONSTRUCTION, AS REQUIRED BY THE CITY OF MERCER ISLAND INSPECTOR, AND REPLACE WITH STANDARD CURB AND GUTTER. EXISTING CURB AND GUTTER MAY BE SALVAGED, DEPENDING ON FINAL CONDITION, PENDING APPROVAL BY THE CITY.

Utilities In Row
ALL UTILITIES IN THE PUBLIC RIGHT-OF-WAY SHALL BE POTHOLED PRIOR TO CONSTRUCTION. INSTALLATION OF WATER, SEWER AND STORM SHALL BE PER THE MOST RECENT WSDOT STANDARD. MINIMUM CLEARANCE BETWEEN WATER VALVES IS 4'. IF NEW CONNECTIONS HAVE CONFLICTS WITH THE EXISTING BELLS, JOINTS, ETC. A REVISION OF THE CIVIL DESIGN IS REQUIRED PRIOR TO ANY WORK.

Onsite Catch Basin Frame/Grate
ALL CATCH BASINS SHALL BE STANDARD HERRINGBONE FRAME AND GRATE PER DETAIL 16/C301 UNLESS OTHERWISE NOTED ON PLANS. BEE-HIVE AND SOLID LIDS ARE CALLED OUT AS SUCH.

Deferred Submittal Notes
THE FOLLOWING ITEMS REQUIRE DEFERRED SUBMITTALS. THE DEFER SUBMITTALS MUST BE REVIEWED BY THE CITY OF MERCER ISLAND AND APPROVAL PRIOR TO CONSTRUCTION:

1. 3" WATER METER VAULT
2. 4" WATER METER VAULT
3. STREET LIGHTS INCLUDING TYPES, HANDHOLES, CONDUIT & WIRE. THE CITY STREET LIGHT IS CHANGING TO LED LIGHT. CONTACT CITY ENGINEER PRIOR TO THE DEFERRED SUBMITTAL FOR THIS ITEM.
4. STREET TREES INCLUDING TREE PLANTING PIT & SOIL, STAKING, CONCRETE BORDER, AND GRATES
5. STREET NAME SIGNS
6. FLATWORK INCLUDING SIDEWALKS, SCORING PATTERNS, CONTROL JOINTS, BORDERS AROUND STREET LIGHTS AND TREE GRATES, CURB/GUTTER, CONCRETE MIX, AND DETECTABLE WARNING STRIPS
7. PAVER BLOCKS

ALL DEFER SUBMITTALS MUST MEET THE CURRENT CITY WATER STANDARDS AND MERCER ISLAND TOWN CENTER STREETSCAPE MANUAL OR AS APPROVED BY THE CITY ENGINEER.

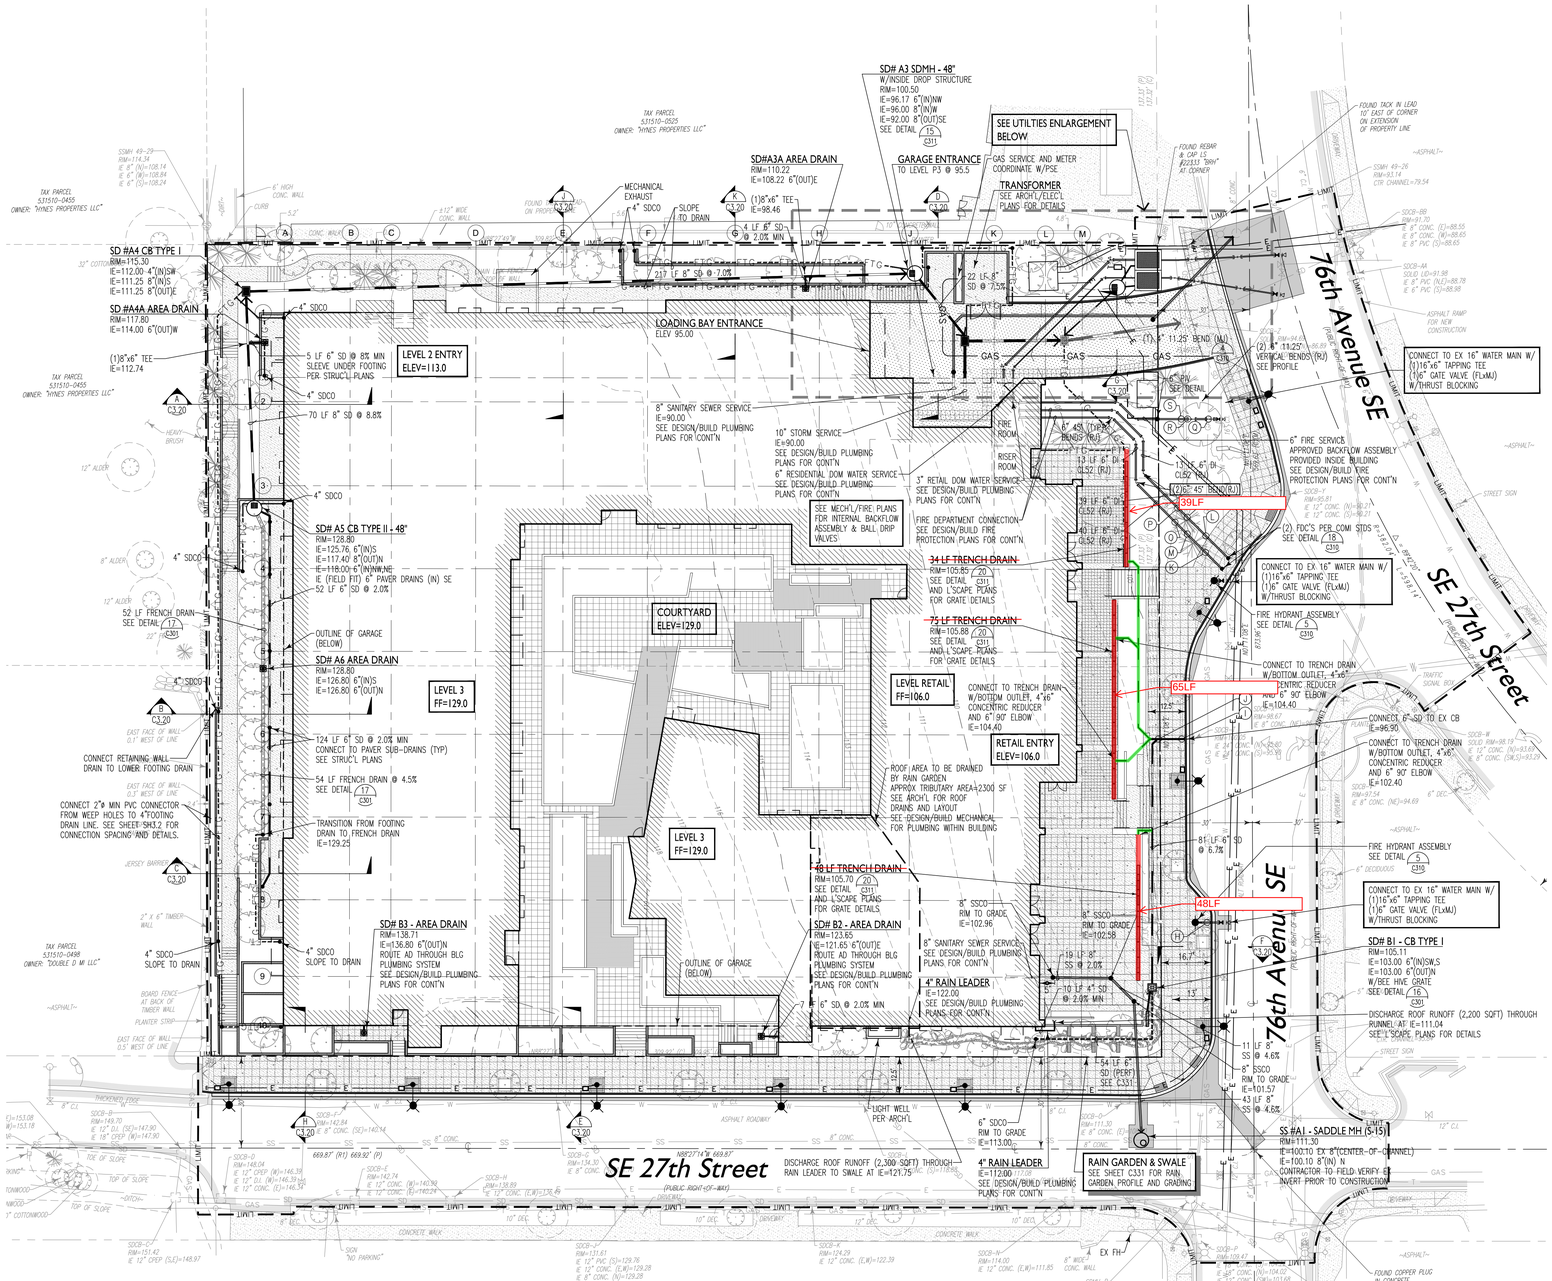

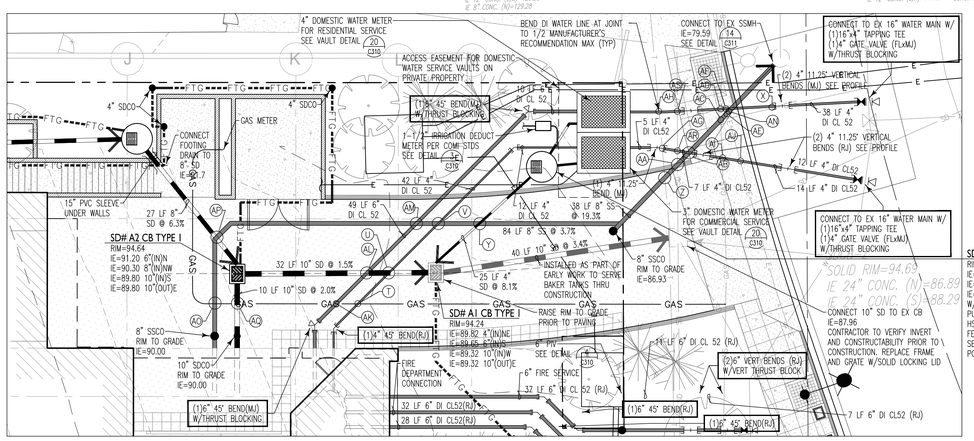

Utilities Enlargement

1"=10'

Legend

	EXISTING	REMOVE	PROPOSED
ASPHALT PAVING			
ASPHALT TREATED BASE (ATB)			
ASPHALT (GRIND AND OVERLAY)			
CONCRETE PAVING			
HEAVY DUTY CONCRETE PAVING			
BUILDINGS			
SAWCUT LINE			
CONSTRUCTION LIMITS			LIMIT
CURBING			
RETAINING WALL			
ROCKERY			
TREE			
CONTOUR (INDEX)			
CONTOUR			
WATER LINE	W		
TRENCH DRAIN			
STORM DRAINAGE LINE	SD		
FOOTING DRAINAGE LINE			
FRENCH DRAIN			FTG
SANITARY SEWER LINE	SS		
POWER	P		P
TELEPHONE LINE	T		
GAS LINE	G		T
WATER METER/VALVE/FH			GAS
STORM CB/MH			
SANITARY SEWER MH/CO			
GAS VALVE/METER			
STREET LIGHT ASSEMBLY			
TELEPHONE RISER/MH	T		T

Utility Crossings

	UPPER IE		LOWER T.O.P.		CLEARANCE
(A)	103.37	12" WATER	96.78	8" SEWER	6.91'
(B)	103.08	8" WATER	96.84	8" SEWER	6.90'
(C)	103.67	16" WATER	96.91	8" SEWER	6.76'
(D)	105.43	4" GAS	96.06	8" SEWER	8.36'
(E)	105.36	4" ELEC	96.10	8" SEWER	8.26'
(F)	101.36	24" STORM	96.23	8" SEWER	4.13'
(G)	105.56	4" TELE	96.41	8" SEWER	8.14'
(H)	101.74	4" GAS	101.07	6" FIRE	0.67'
(I)	98.31	4" ELEC	97.42	6" STORM	0.89'
(J)	98.43	4" TELE	97.57	6" STORM	0.86'
(K)	95.92	4" GAS	95.25	6" FIRE	0.67'
(L)	95.84	4" GAS	95.17	6" FIRE	0.67'
(M)	94.57	6" FIRE	92.38	24" STORM	2.19'
(N)	94.43	6" FIRE	92.11	24" STORM	2.32'
(O)	95.51	4" TELE	94.84	6" FIRE	0.67'
(P)	95.35	4" TELE	94.68	6" FIRE	0.67'
(Q)	93.46	4" TELE	92.79	6" FIRE	0.67'
(R)	92.52	6" FIRE	91.8	24" STORM	0.72'
(S)	93.20	4" TELE	92.53	6" FIRE	0.67'
(T)	92.03	4" GAS	91.36	3" WATER	0.67'
(U)	91.06	3" WATER	90.26	10" STORM	0.80'
(V)	90.98	3" WATER	88.04	8" SEWER	2.94'
(X)	91.06	4" GAS	90.39	4" WATER	0.67'
(Y)	90.78	4" STORM	88.44	8" SEWER	2.34'
(Z)	92.09	4" TELE	89.61	8" SEWER	2.48'
(AA)	86.09	24" STORM	84.03	8" SEWER	2.06'
(AB)	90.64	6" WATER	83.26	8" SEWER	7.38'
(AC)	91.55	4" GAS	82.10	8" SEWER	9.45
(AD)	91.55	4" GAS	90.88	4" WATER	0.67'
(AE)	91.55	4" ELEC	81.91	8" SEWER	9.64'
(AF)	91.55	4" ELEC	90.88	4" WATER	0.67'
(AG)	91.81	4" TELE	91.14	6" WATER	0.67'
(AH)	91.44	4" TELE	90.77	4" WATER	0.67'
(AI)	91.77	4" GAS	91.10	6" WATER	0.67'
(AJ)	91.47	4" ELEC	90.80	6" WATER	0.67'
(AK)	92.03	4" GAS	91.36	6" WATER	0.67'
(AL)	91.81	6" WATER	90.32	10" STORM	1.49'
(AM)	90.73	6" WATER	88.82	8" SEWER	1.91'
(AN)	90.38	6" WATER	82.52	8" SEWER	7.86'
(AO)	92.32	4" GAS	90.49	8" SEWER	1.83'
(AP)	90.71	8" STORM	90.08	8" SEWER	0.63'
(AQ)	92.32	4" GAS	90.73	10" STORM	1.59'
(AR)	90.64	6" WATER	87.94	24" STORM	2.70'
(AS)	90.01	4" WATER	87.64	24" STORM	2.37'

NOTE: LOCATIONS OF GRAVITY UTILITIES BASED ON INTERPOLATION FROM SURVEY INFORMATION, ALL OTHER UTILITIES ARE AT ASSUMED BURY DEPTHS. CONTRACTOR TO VERIFY PRIOR TO CONSTRUCTION.

COUGHLIN PORTER LUNDEEN

801 SECOND AVENUE - SUITE 900
SEATTLE, WA 98104

P: 206/343-0460
F: 206/343-5691

A CONSULTING STRUCTURAL AND CIVIL ENGINEERING CORPORATION

CONSULTANT

PROJECT

LEGACY, MERCER ISLAND

2601 76th Ave SE
MERCER ISLAND, WA

68312

OWNER

LEGACY PARTNERS RESIDENTIAL DEVELOPMENT INC.

PROFESSIONAL SEAL

DESIGN TEAM
JNP
PRINCIPAL
AJF
PROJECT MANAGER
BJB
PROJECT ENGINEER
CAP
DRAWN BY
AJF/JNP
CHECKED BY

DRAWING SET DESCRIPTION
Issued For Construction

REVISIONS

No.	DATE	DESCRIPTION

SHEET TITLE
UTILITY PLAN

SHEET NUMBER
C300

ISSUE DATE
8-11-2015

ALL RIGHTS RESERVED BY VIA ARCHITECTURE INCORPORATED. THIS DESIGN IS NOT TO BE USED OR REPRODUCED WITHOUT THE CONSENT OF VIA ARCHITECTURE INCORPORATED.